


# PTVA120252MT


## Thermally-Enhanced High Power RF LDMOS FET 25 W, 48 V, 500 – 1400 MHz

### Description

The PTVA120252MT LDMOS FET is a 25-watt LDMOS FET designed for use in power amplifier applications in the 500 MHz to 1400 MHz frequency band. Features include high gain and a thermally-enhanced, surface-mount package. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

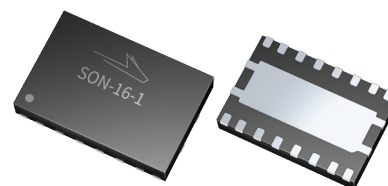

PTVA120252MT  
Package PG-SON-16

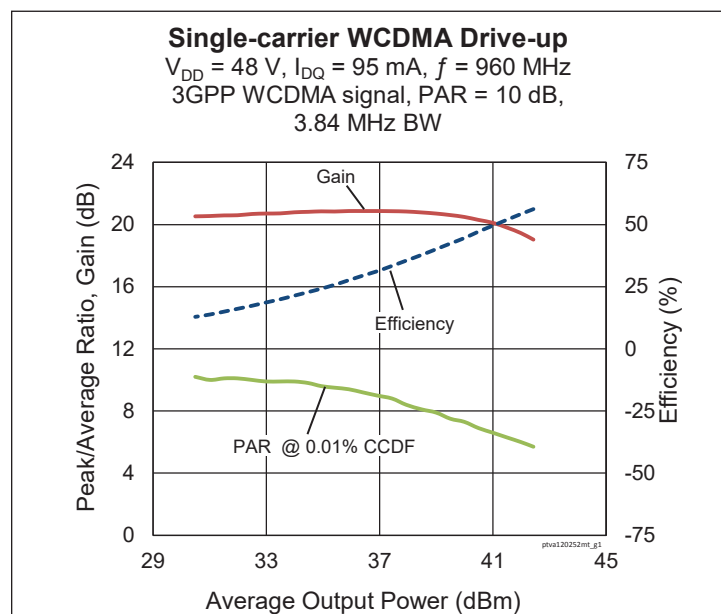

### Features

- Unmatched
- Target CW performance 960 MHz, 48 V, combined outputs
  - Output power at  $P_{1dB} = 25\text{ W}$
  - Gain = 19.8 dB
  - Efficiency = 64%
- Capable of handling 10:1 VSWR @ 48 V, 20 W CW output power
- Integrated ESD protection
- Human Body Model class 1C (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (tested in an Wolfspeed production test fixture)

$V_{DD} = 48\text{ V}$ ,  $I_{DQ} = 87\text{ mA}$ ,  $P_{OUT} = 5.5\text{ W}$  average,  $f = 960\text{ MHz}$ , 3GPP WCDMA signal, 3.84 MHz bandwidth, 10 dB PAR @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Linear Gain	$G_{ps}$	18.5	19.5	—	dB
Drain Efficiency	$\eta_D$	28	31.5	—	%
Adjacent Channel Power Ratio	ACPR	—	-33.5	-31	dBc

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

**DC Characteristics** (each side)

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1	$\mu\text{A}$
	$V_{DS} = 105\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	2.8	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 48\text{ V}, I_{DQ} = 85\text{ mA}$	$V_{GS}$	3	3.65	4	V

**Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Operating Voltage	$V_{DD}$	0 to +55	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$





**Thermal Characteristics**

Parameter	Symbol	Value	Unit
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}, 25\text{ W CW}$ )	$R_{\theta JC}$	2.6	$^{\circ}\text{C/W}$



**Ordering Information**

Type and Version	Order Code	Package Description	Shipping
PTVA120252MT V1 R1K	PTVA120252MT-V1-R1K	PG-SON-16, plastic package	Tape & Reel, 1000 pcs

**Typical RF Performance** (data taken in production test fixture)

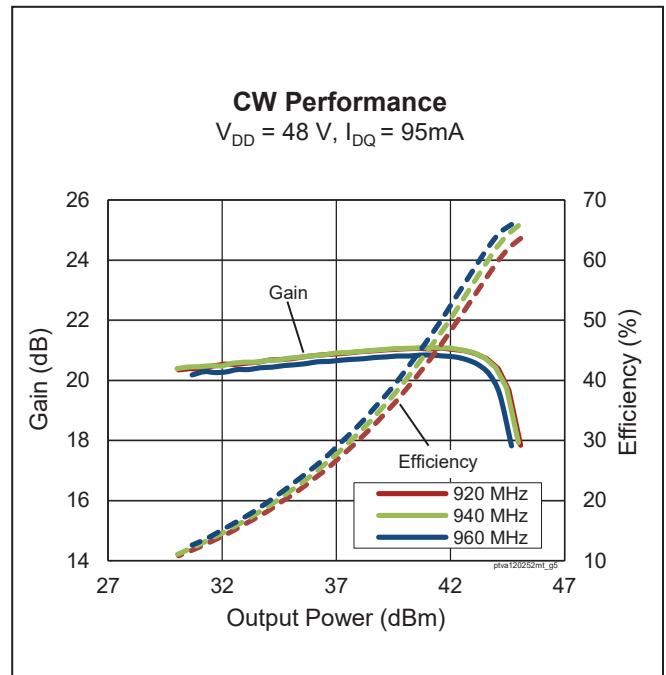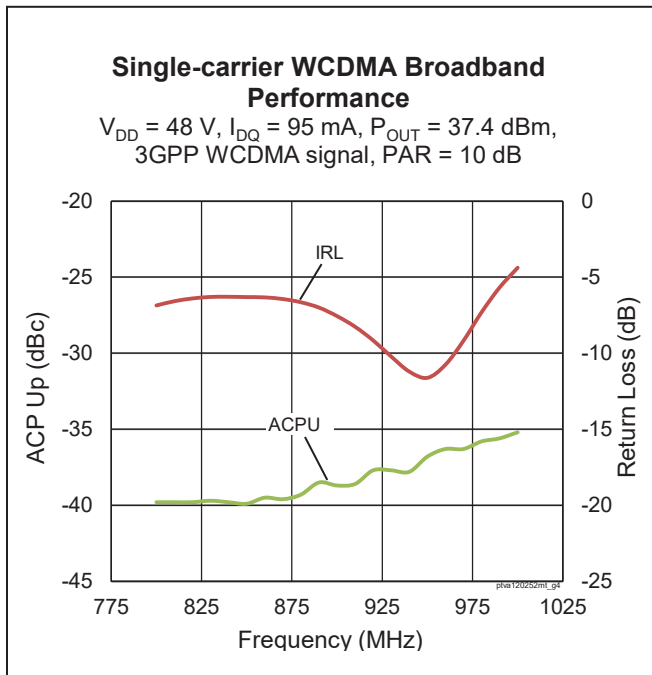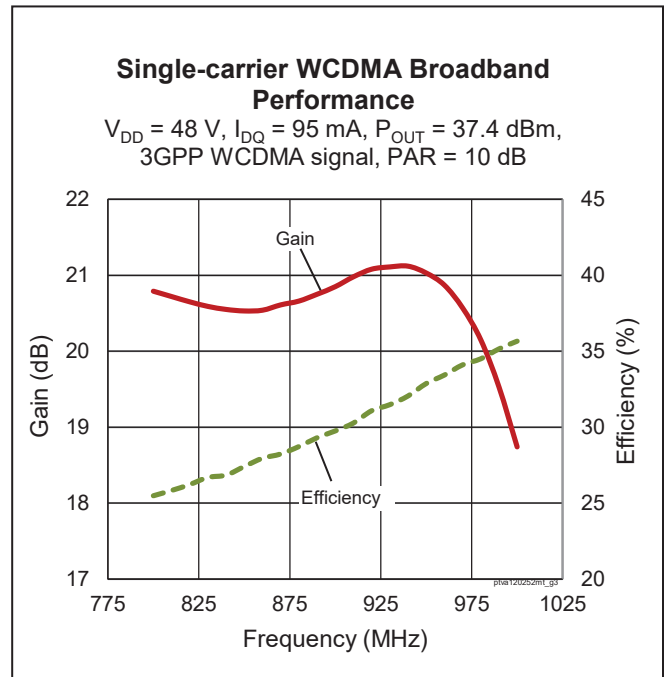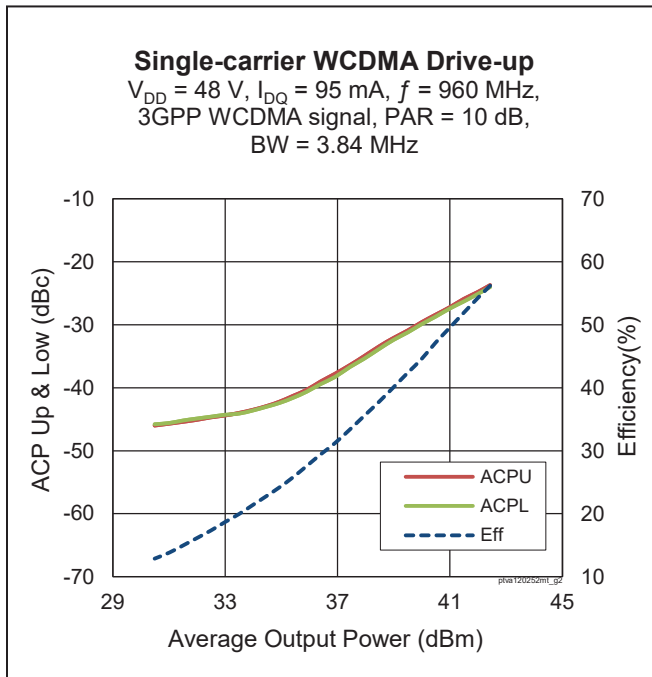

Typical RF Performance (cont.)

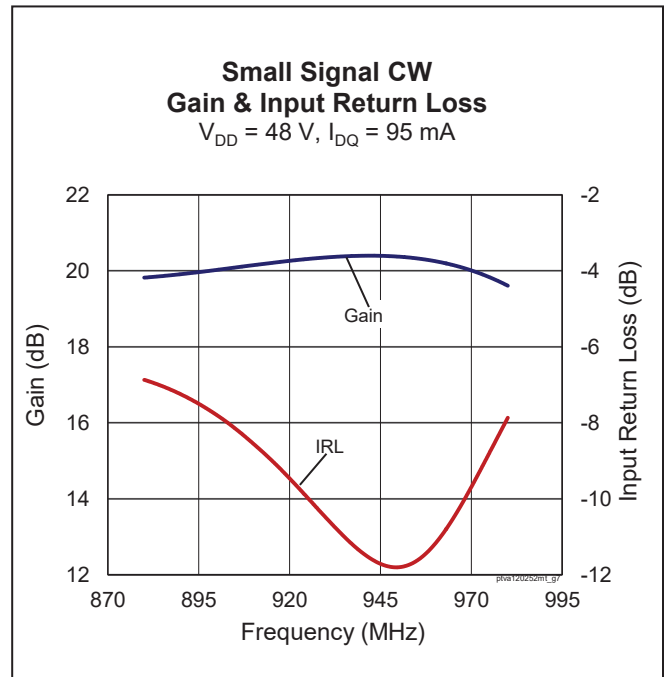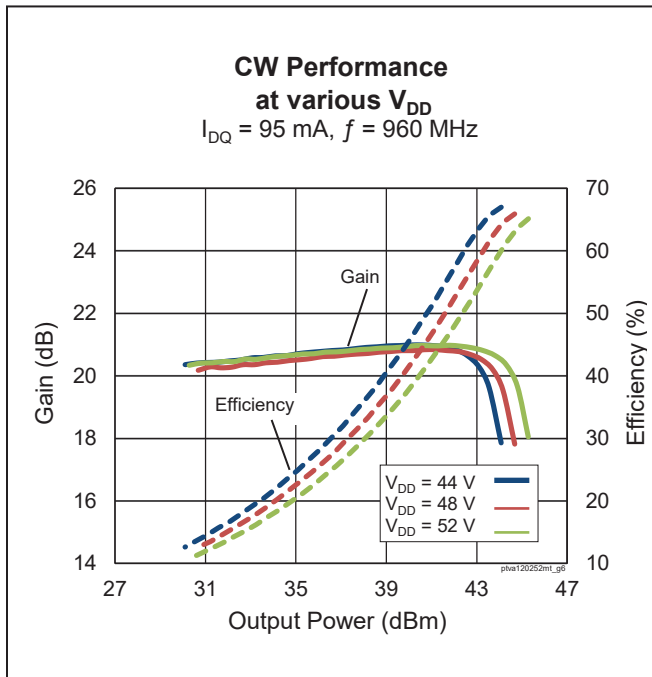


Load Pull Performance

Load Pull Performance – Pulsed CW signal: 10  $\mu\text{s}$ , 10% duty cycle, 48 V,  $I_{DQ} = 40 \text{ mA}$

Freq [MHz]	$Z_s$ [ $\Omega$ ]	$P_{1dB}$									
		Max Output Power					Max PAE				
		$Z_I$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	PAE [%]	$Z_I$ [ $\Omega$ ]	Gain [dB]	$P_{OUT}$ [dBm]	$P_{OUT}$ [W]	PAE [%]
791	3.12+j7.44	18.94+j8.73	20.85	45.06	32.06	60.1	10.67+j26.27	23.27	41.79	15.10	70.8
821	3.2+j7	18.77+j9.38	20.54	45.03	31.84	59.7	10+j25.7	22.94	41.76	15.00	69.8
869	3.08+j6.56	20.14+j8.78	19.75	44.95	31.26	58.0	14.39+j21	21.46	43.59	22.86	68.0
894	3.02+j6.56	19.72+j9.41	19.41	44.79	30.13	57.5	9.22+j25.02	21.61	41.69	14.76	68.2
925	2.9+j6.12	20.67+j9.26	18.85	45.06	32.06	57.6	14.61+j21.69	20.44	43.55	22.65	66.0
960	2.86+j5.68	18.72+j9.45	18.2	44.80	30.20	55.6	9.75+j23.93	20.24	42.07	16.11	65.5

### Reference Circuit, 925 – 960 MHz

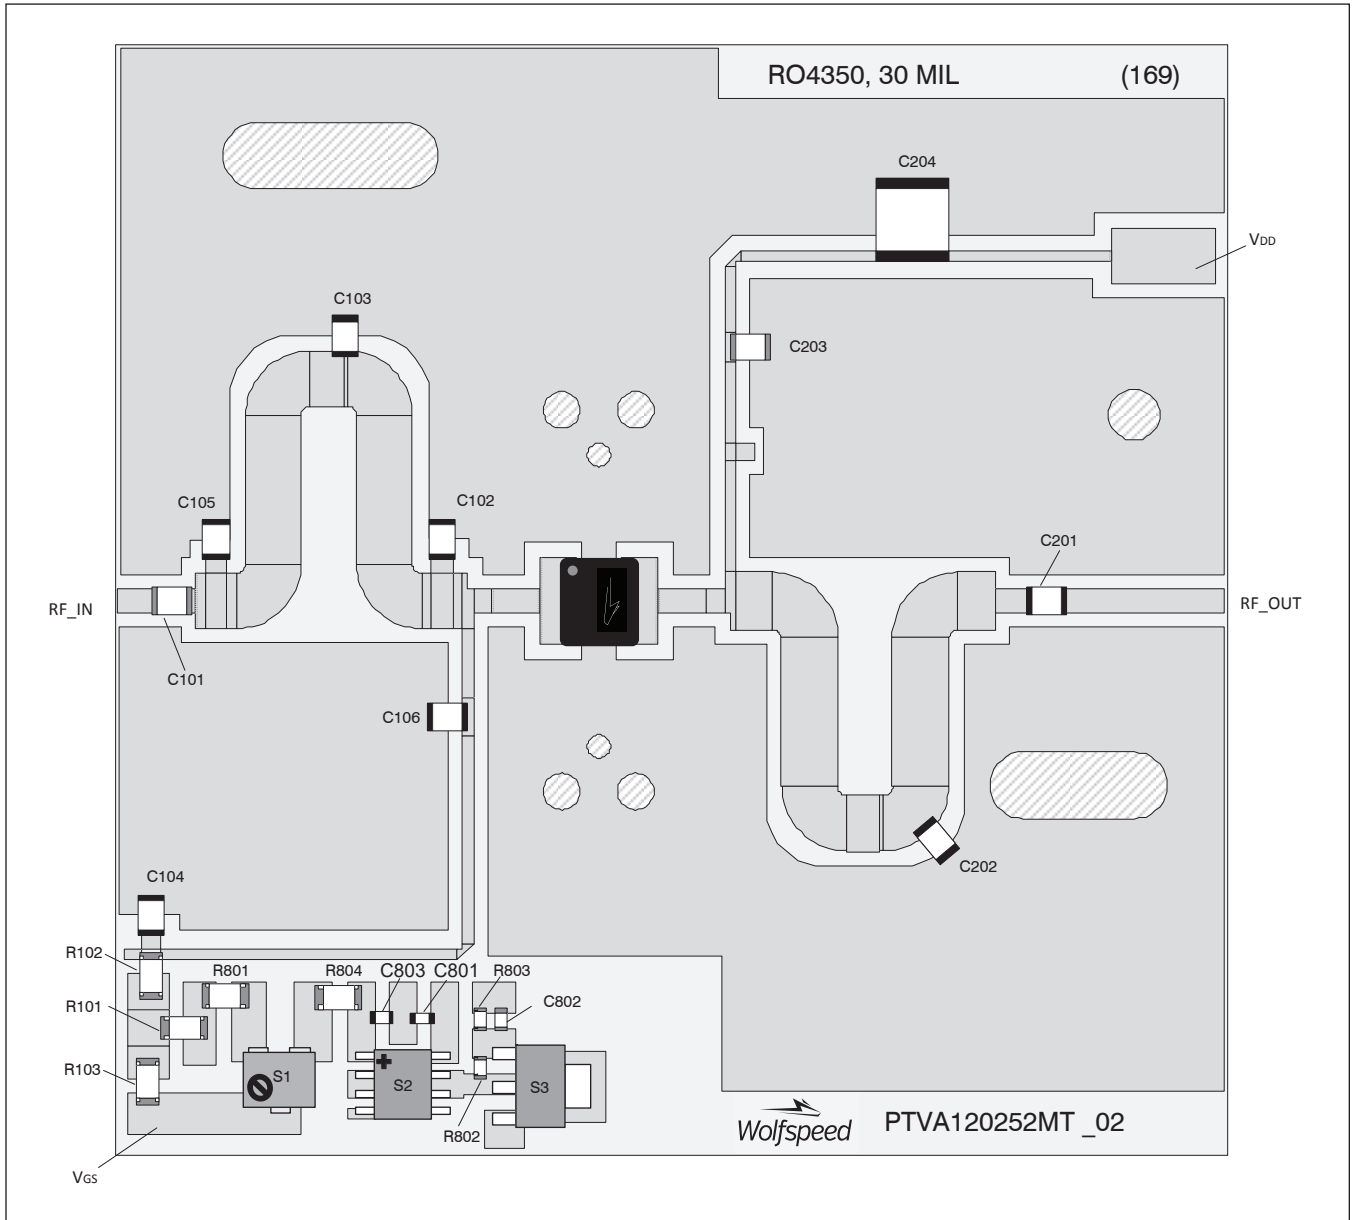

Reference circuit assembly diagram (not to scale)


**Reference Circuit** (cont.)**Reference Circuit Assembly**

DUT	PTVA120252MT V1
Test Fixture Part No.	LTN/PTVA120252MT V1
PCB	Rogers 4350, 0.762 mm [0.030"] thick, 2 oz. copper, $\epsilon_r = 3.66$ , $f = 925 - 960$ MHz
Find Gerber files for this test fixture on the Wolfspeed Web site at <a href="http://www.wolfspeed.com/RF">http://www.wolfspeed.com/RF</a>	


**Components Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101, C104, C106	Capacitor, 75 pF	ATC	ATC100B750JW500XB
C102	Capacitor, 14 pF	ATC	ATC100B140KW500XB
C103	Capacitor, 2.2 pF	ATC	ATC100B2R2DW500XB
C105	Capacitor, 2.5 pF	ATC	ATC100B2R5CW500XB
R101, R103	Resistor, 200 ohms	Panasonic Electronic Components	ERJ-8GEYJ201V
R102	Resistor, 10 ohms	Panasonic Electronic Components	ERJ-8GEYJ100V
<b>Output</b>			
C201, C203	Capacitor, 75 pF	ATC	ATC100B750JW500XB
C202	Capacitor, 2.0 pF	ATC	ATC100B2R0CW500XB
C204	Capacitor, 10 $\mu$ F	TDK Corporation	C5750X5R1H106K230KA
C801, C802, C803	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R801	Resistor, 10 ohms	Panasonic Electronic Components	ERJ-8GEYJ100V
R802	Resistor, 1.2K ohms	Panasonic Electronic Components	ERJ-3GEYJ122V
R803	Resistor, 1.3K ohms	Panasonic Electronic Components	ERJ-3GEYJ132V
R804	Resistor, 100 ohms	Panasonic Electronic Components	ERJ-8GEYJ101V
S1	Potentiometer 2K ohms	Bourns Inc.	3224W-1-202E
S2	Voltage Regulator	Texas Instruments	LM78L05ACM
S3	Transistor	Infineon Technologies	BCP56

**Pinout Diagram** (top view)

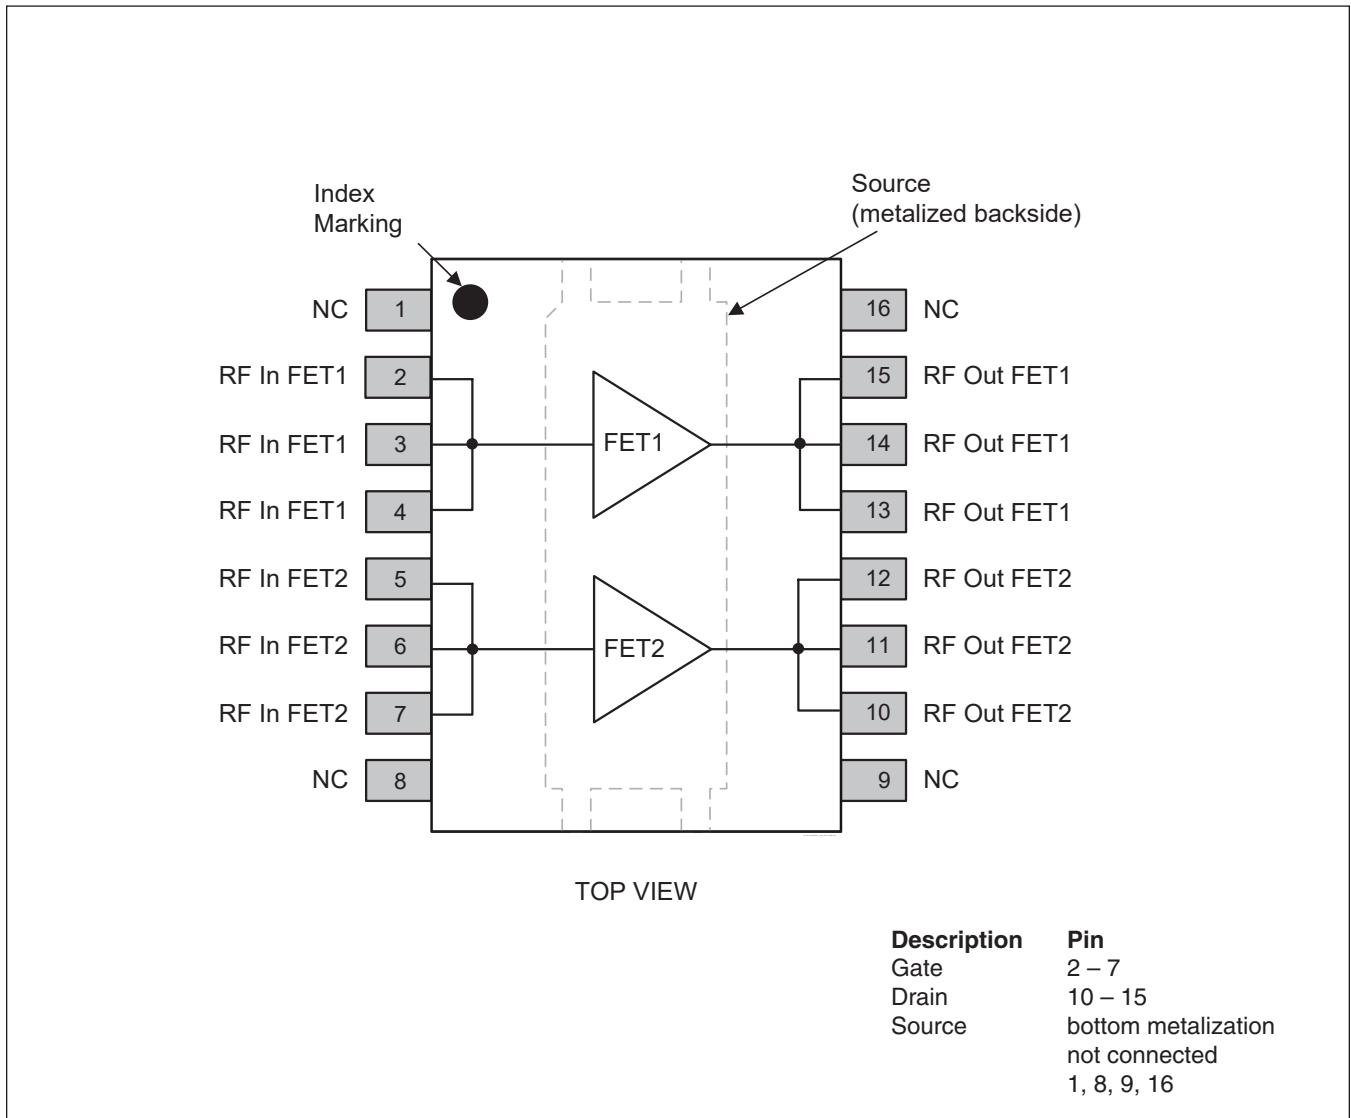

Package Outline Specifications

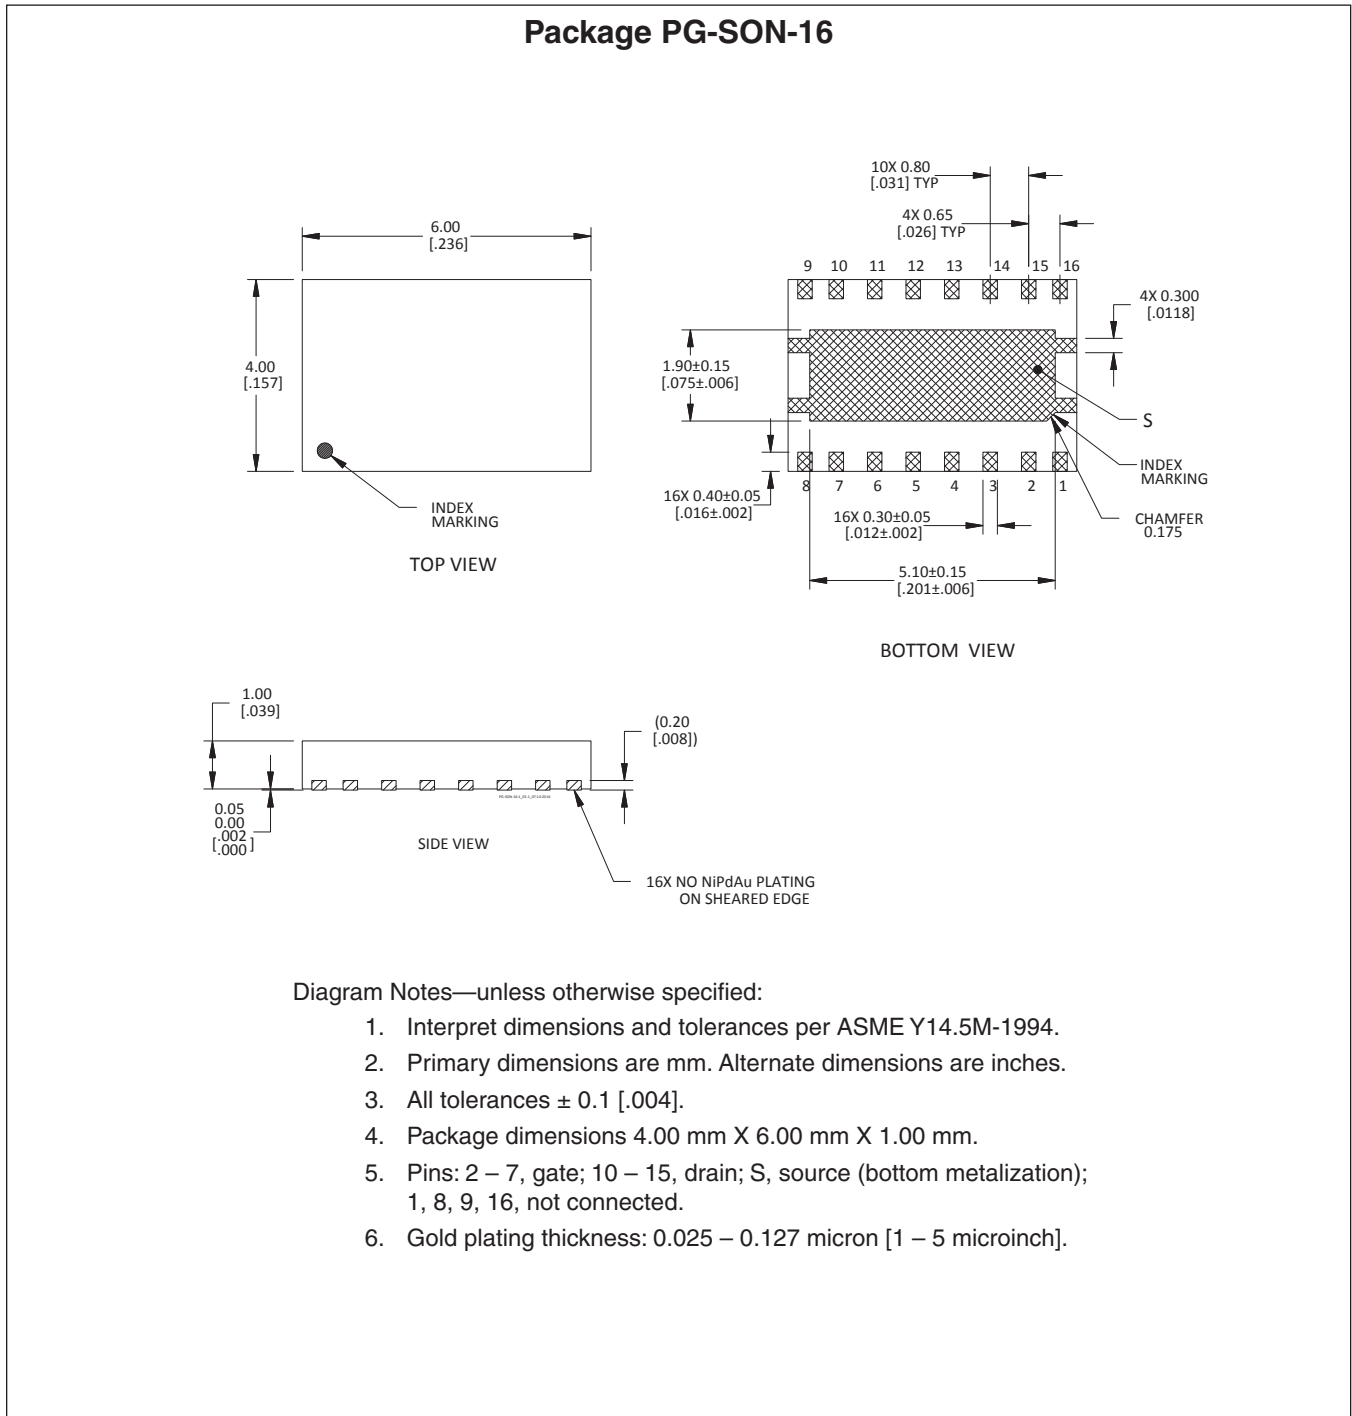



## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2016-03-03	Advance	All	Data Sheet reflects advance specification for product development
02	2016-06-08	Advance	All	Revised package outline (1)
02.1	2016-07-26	Advance	4	Revised package outline (2)
03	2016-09-26	Production	All	Data Sheet reflects released product specification
03.1	2016-09-26	Production	All	Revised ordering information
03.2	2016-09-26	Production	All	Revised circuit components information
03.3	2016-10-03	Production	All	Revised circuit
03.4	2017-02-07	Production	2	Updated operating voltage and junction temperature
04	2018-06-20	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive  
 Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
 919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.