

# PTVA092407NF


## Thermally-Enhanced High Power RF LDMOS FET 240 W, 48 V, 869 – 960 MHz

### Description

The PTVA092407NF is a 240-watt LDMOS FET manufactured with Wolfspeed's 48-V LDMOS process. It is designed for use in multi-standard cellular power amplifier applications. It features a single ended design and input and output matching that allow for use from 869 MHz to 960 MHz. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA092407NF  
Package PG-HBSOF-4-2

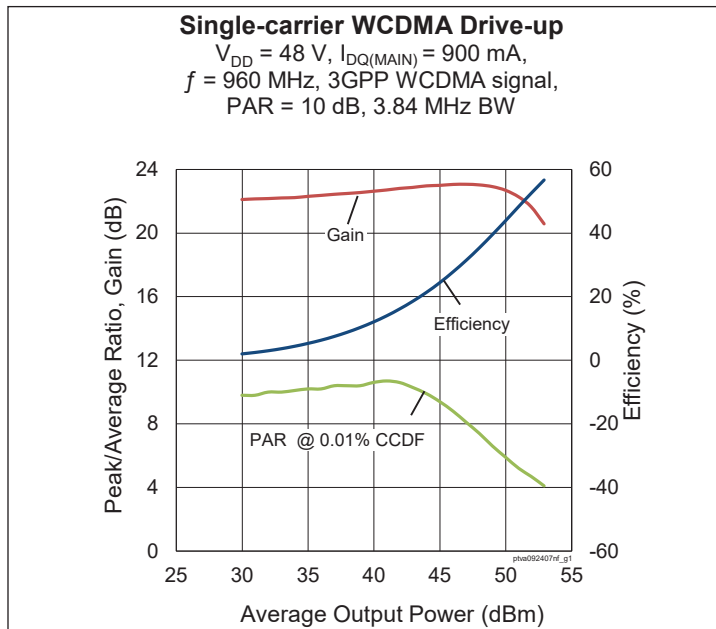

### Features

- Broadband internal input and output matching
- Typical CW performance, 960 MHz, 48 V, 10  $\mu\text{s}$  pulse width, 10% duty cycle, single side
  - Output power at  $P_{1dB} = 240\text{ W}$
  - Output power at  $P_{3dB} = 287\text{ W}$
  - Gain = 20 dB
  - Efficiency = 62%
- Capable of handling 10:1 VSWR @ 48 V, 80 W CW output power
- Integrated ESD protection
- Human Body Model class 2 (per ANSI/ESDA/ JEDEC JS-001)
- Low thermal resistance
- Pb-free and RoHS compliant

### RF Characteristics

#### Single-carrier WCDMA Specifications (tested in Wolfspeed production test fixture)

$V_{DD} = 48\text{ V}$ ,  $I_{DQ} = 900\text{ mA}$ ,  $P_{OUT} = 80\text{ W}$  avg,  $f = 960\text{ MHz}$ , 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 10 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Linear Gain	$G_{ps}$	21.3	22.5	—	dB
Drain Efficiency	$\eta_D$	38	40	—	%
Adjacent Channel Power Ratio	ACPR	—	-30	-28.5	dBc
Output PAR @ 0.01% CCDF	OPAR	5.7	6.2	—	dB

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}, I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1	$\mu\text{A}$
	$V_{DS} = 105\text{ V}, V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	10	$\mu\text{A}$
Gate Leakage Current	$V_{GS} = 10\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1	$\mu\text{A}$
On-State Resistance (Main)	$V_{GS} = 10\text{ V}, V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.13	—	$\Omega$
Operating Gate Voltage (Main)	$V_{DS} = 48\text{ V}, I_{DQ} = 900\text{ mA}$	$V_{GS}$	3.3	3.7	4.1	V

## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	105	V
Gate-Source Voltage	$V_{GS}$	-6 to +12	V
Operating Voltage	$V_{DD}$	0 to +55	V
Junction Temperature	$T_J$	225	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 to +150	$^{\circ}\text{C}$

1. Operation above the maximum values listed here may cause permanent damage. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the component. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. For reliable continuous operation, the device should be operated within the operating voltage range ( $V_{DD}$ ) specified above.

2. Parameters values can be affected by end application and product usage. Values may change over time.





## Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal Resistance (Main, $T_{CASE} = 70^{\circ}\text{C}, 240\text{ W CW}$ )	$R_{\theta JC}$	0.29	$^{\circ}\text{C/W}$

## Ordering Information



Type and Version	Order Code	Package Description	Shipping
PTVA092407NF V2 R5	PTVA092407NF-V2-R5	PG-HBSOF-4-2, plastic package	Tape & Reel, 500 pcs

**Typical RF Performance** (data taken in production test fixture)

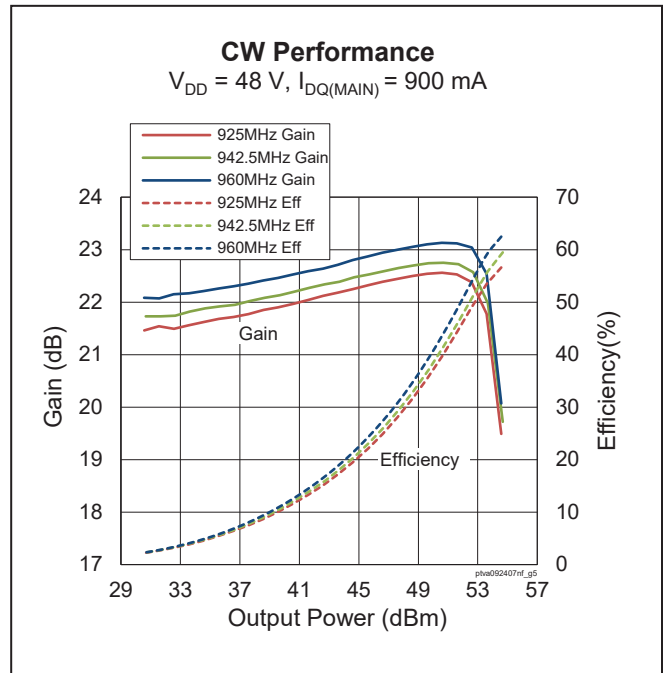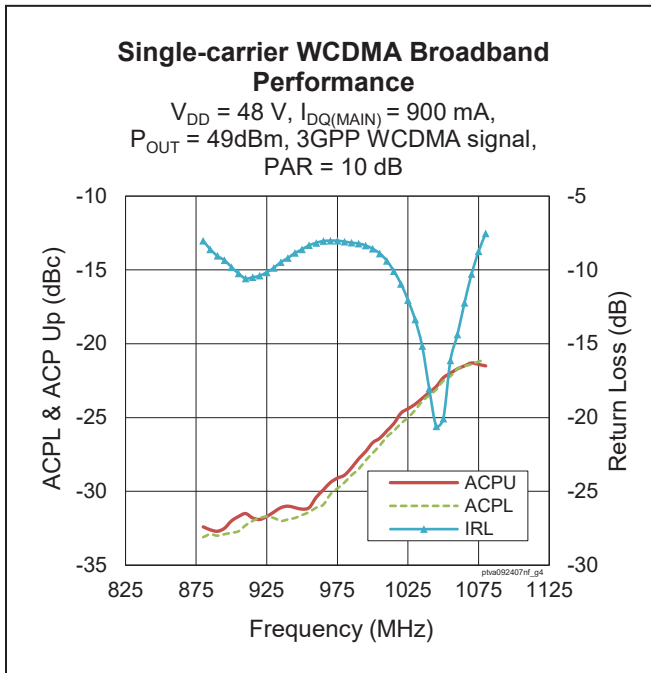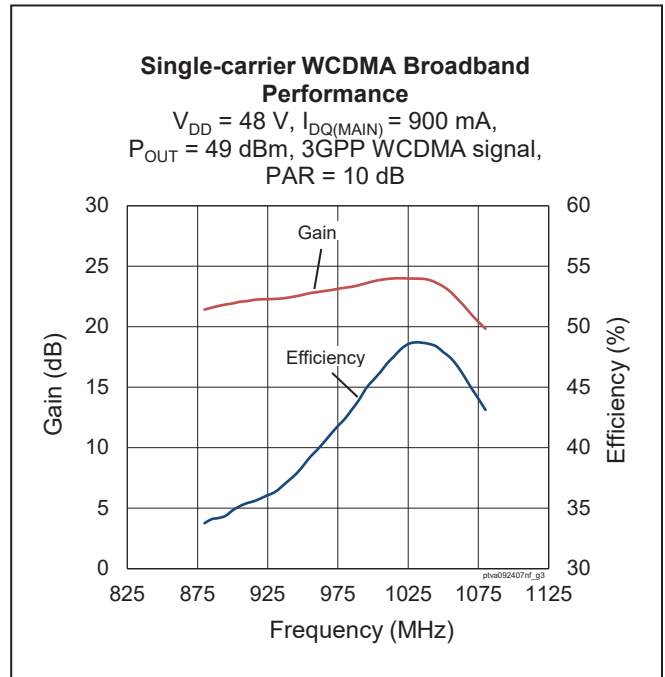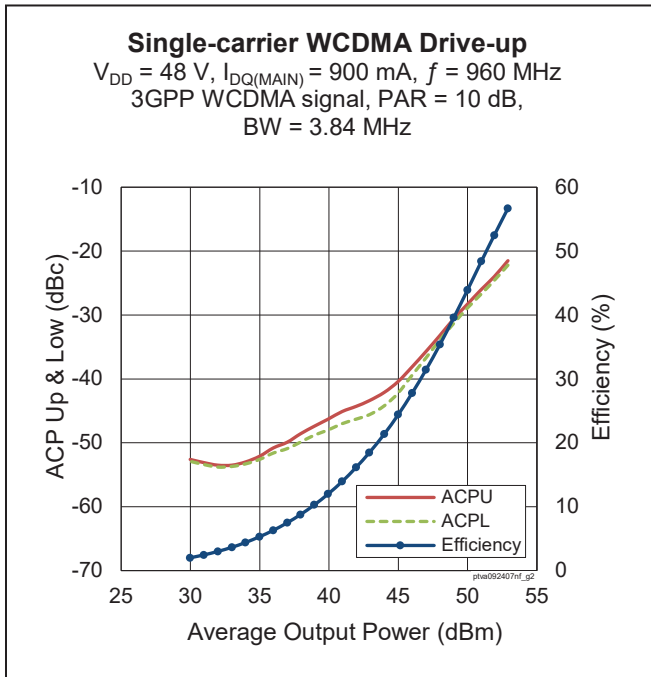



Typical RF Performance (cont.)

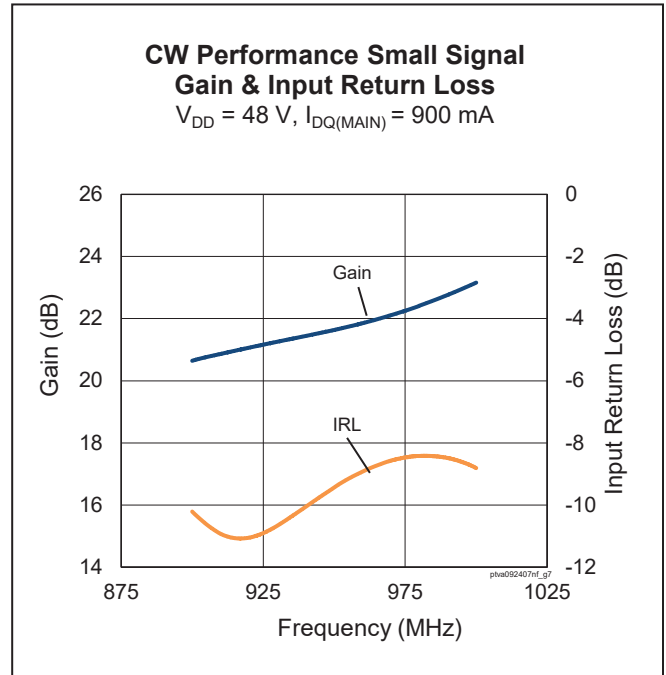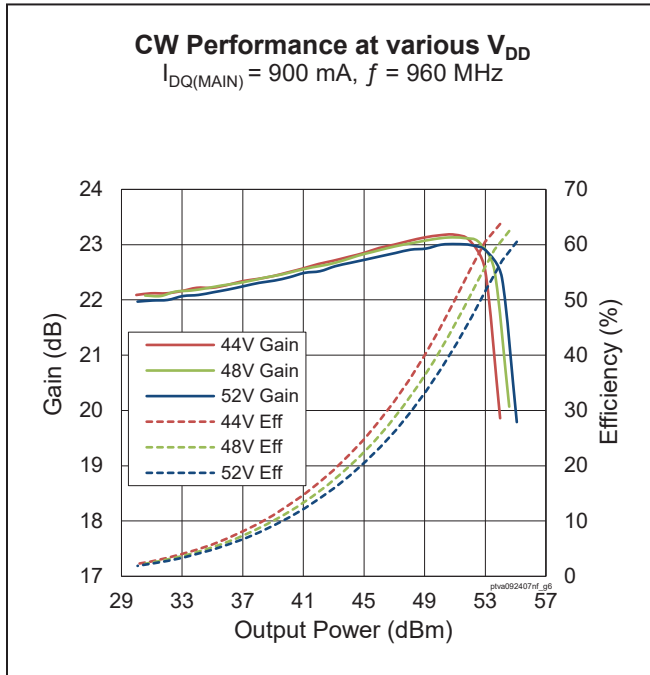

Load Pull Performance


Each Side Load Pull Performance – Pulsed CW signal: 10  $\mu\text{s}$ , 10% duty cycle, 48 V,  $I_{DQ} = 480 \text{ mA}$

		$P_{1dB}$									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Zs [ $\Omega$ ]	Zl [ $\Omega$ ]	Gain [dB]	$P_{1dB}$ [dBm]	$P_{1dB}$ [W]	$\eta_D$ [%]	Zl [ $\Omega$ ]	Gain [dB]	$P_{1dB}$ [dBm]	$P_{1dB}$ [W]	$\eta_D$ [%]
869	0.69-j3.06	1.52-j0.62	20.83	55.70	371.54	57.6	2.72+j1.29	23.07	53.51	224.39	71.3
925	1.29-j3.32	1.46-j0.56	21.35	55.55	354.81	60.4	2.24+j1.18	23.44	53.27	212.32	70.5
960	2.45-j3.23	1.31-j0.55	21.52	55.51	355.63	59.9	2.01+j0.7	23.39	53.66	232.27	71.7

		$P_{3dB}$									
		Max Output Power					Max Drain Efficiency				
Freq [MHz]	Zs [ $\Omega$ ]	Zl [ $\Omega$ ]	Gain [dB]	$P_{3dB}$ [dBm]	$P_{3dB}$ [W]	$\eta_D$ [%]	Zl [ $\Omega$ ]	Gain [dB]	$P_{3dB}$ [dBm]	$P_{3dB}$ [W]	$\eta_D$ [%]
869	0.69-j3.06	1.55-j0.78	18.81	56.40	436.52	60.0	2.81+j1.47	21.17	53.84	242.1	71.9
925	1.29-j3.32	1.58-j0.7	19.43	56.30	426.58	63.2	2.27+j1.17	21.46	53.90	245.47	72.6
960	2.45-j3.23	1.41-j0.54	19.72	56.17	414	64.7	1.76+j0.92	21.5	53.87	243.78	72.7

**Reference Circuit, 869 – 960 MHz**

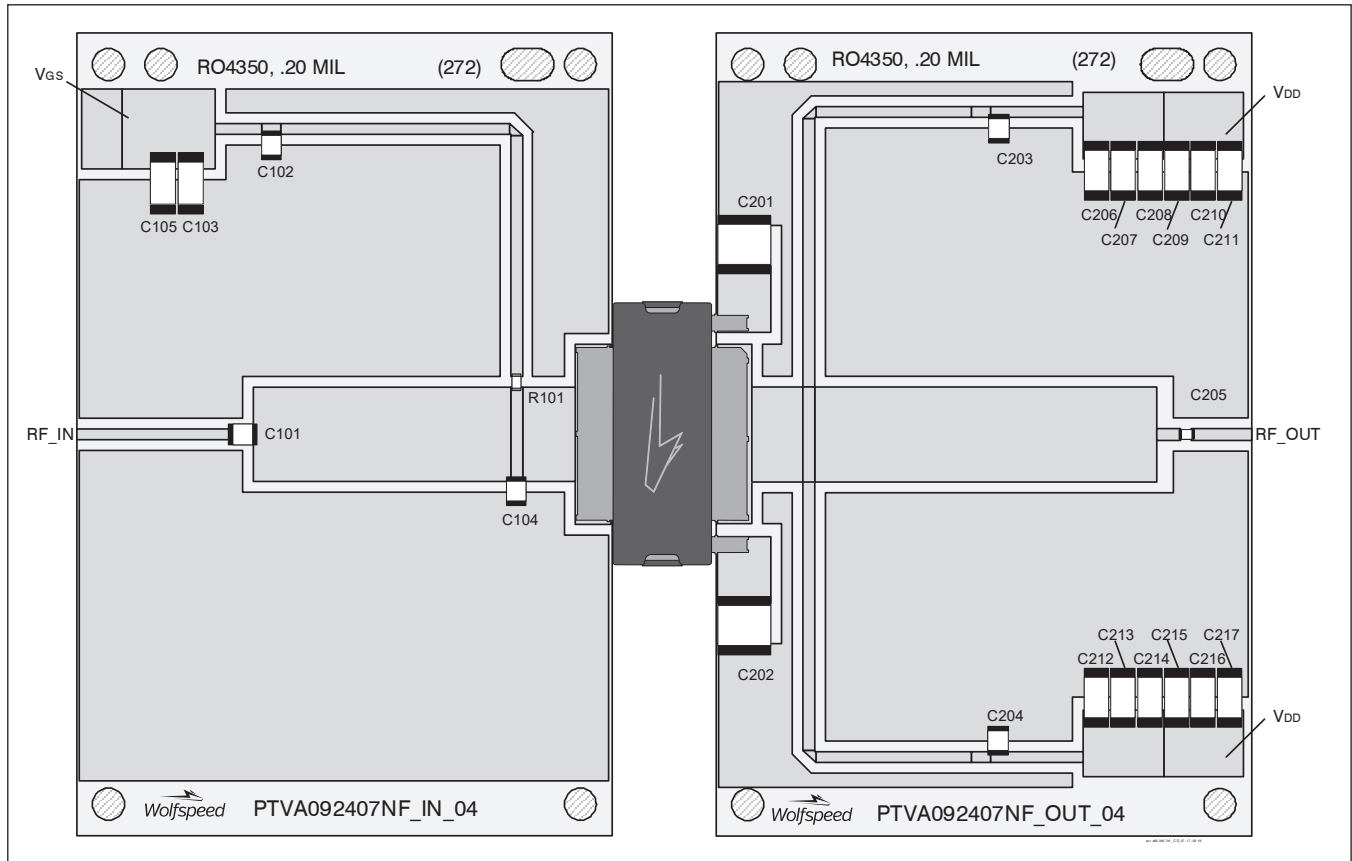

Reference circuit assembly diagram (not to scale)

**Reference Circuit Assembly**


DUT	PTVA092407NF V2
Test Fixture Part No.	LTN/PTVA092407NF V2
PCB	Rogers 4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$ , $f = 869 - 960$ MHz
Find Gerber files for this test fixture on the Wolfspeed Web site at <a href="http://www.wolfspeed.com/RF">www.wolfspeed.com/RF</a>	

**Components Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101	Capacitor, 47 pF	ATC	ATC100B470KW500XT
C102	Capacitor, 75 pF	ATC	ATC100B750KW500XT
C103, C105	Capacitor, 10 $\mu$ F, 100 V	TDK Corporation	C5750X7S2A106M230KB
C104	Capacitor, 3.6 pF	ATC	ATC100B3R6CW500XT
R101	Resistor, 10 ohms	Panasonic Electronic Components	ERJ-8GEYJ100V
<b>Output</b>			
C201, C202, C206, C207, C208, C209, C210, C211, C212, C213, C214, C215, C216, C217	Capacitor, 10 $\mu$ F, 100 V	TDK Corporation	C5750X7S2A106M230KB
C203, C204	Capacitor, 75 pF	ATC	ATC100B750KW500XT
C205	Capacitor, 10 pF	ATC	ATC100A101JW150XT



**Pinout Diagram** (top view)

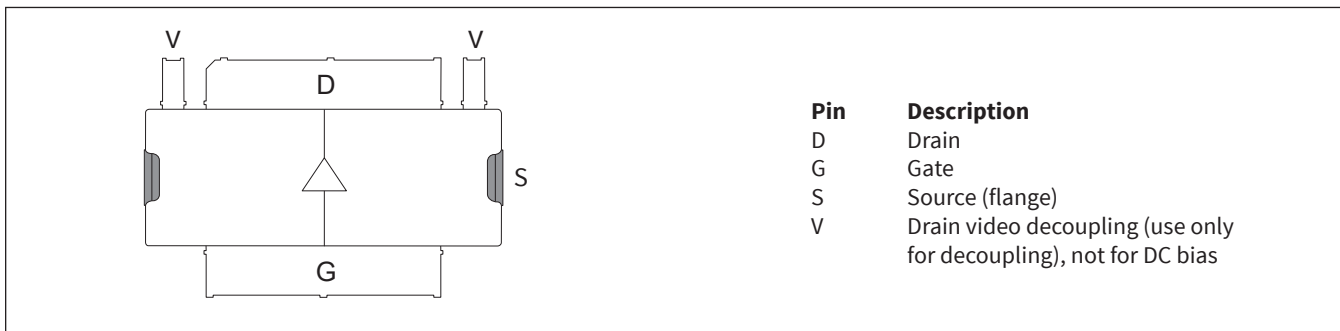

## Package Outline Specifications

### Package PG-HBSOF-4-2

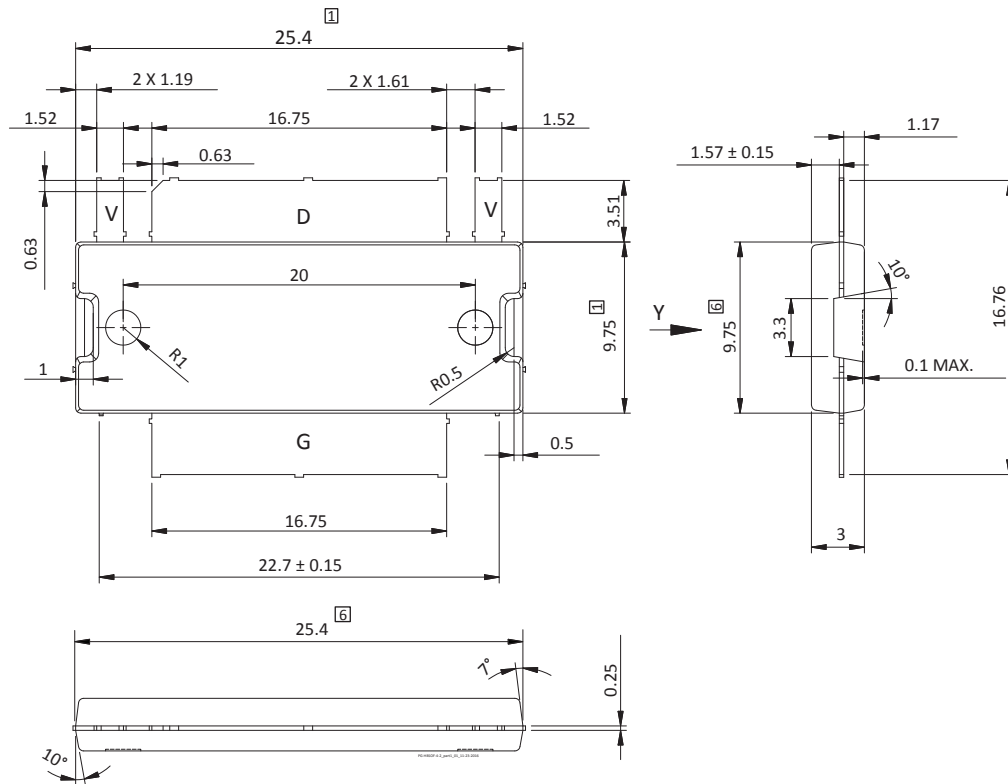


Diagram Notes – unless otherwise specified:

1. Mold/dam bar/metal protrusion of 0.30 mm max per side not included.
2. Metal protrusion are connected to source and shall not exceed 0.10 mm max.
3. Fillets and radii: all radii are 0.3 mm max.
4. Interpret dimensions and tolerances per ISO 8015.
5. Dimensions are mm.
6. Do not include mold/dam bar/metal protrusion.
7. Exposed metal surface is tin-plated, may not be covered by mold compound.
8. All tolerances ± 0.1 mm unless specified otherwise.
9. All metal surfaces are tin-plated, except area of cut.
10. Lead thickness: 0.25 mm.
11. Pins: D = drain; G = gate; S – source; V = drain video decoupling (use only for decoupling), not for DC bias.

## Package Outline Specifications (cont.)

### Package PG-HBSOF-4-2

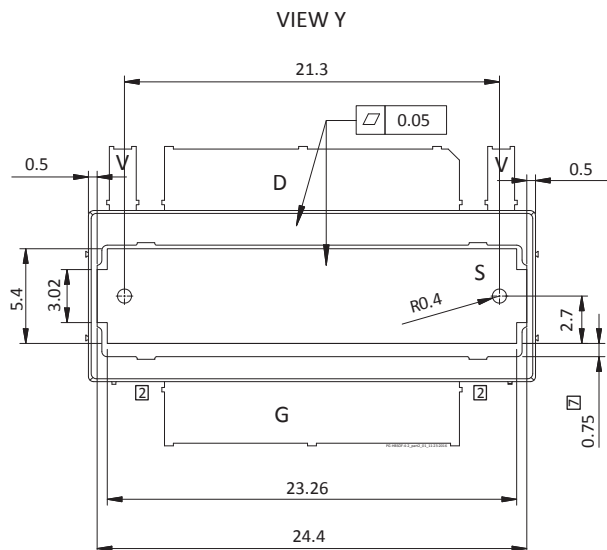


Diagram Notes – unless otherwise specified:

1. Modem/dam bar/metal protrusion of 0.30 mm max per side not included.
2. Metal protrusion are connected to source and shall not exceed 0.10 mm max.
3. Fillets and radii: all radii are 0.3 mm max.
4. Interpret dimensions and tolerances per ISO 8015.
5. Dimensions are mm.
6. Dose not include mold/dam bar/metal protrusion.
7. Exposed metal surface is tin-plated, may not be covered by mold compound.
8. All toleranceds  $\pm 0.1$  mm unless specified otherwise.
9. All metal surfaces are tin-plated, except area of cut.
10. Lead thickness: 0.25 mm.
11. Pins: D = drain; G = gate; S = source; V = drain video decoupling (use only for decoupling), not for DC bias.



## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2016-03-17	Advance	All	Data Sheet reflects advance specification for product development
02	2016-09-12	Production	All	Data Sheet reflects released product specification
02.1	2016-11-23	Production	2	Revised conditions in DC Characteristics table
02.2	2016-12-01	Production	1	Updated Features list
02.3	2016-12-07	Production	1	Revised typo in Features
02.4	2017-02-07	Production	2	Updated operating voltage and junction temperature
03	2018-07-30	Production	All	Revised to V2. Updated the specification, graphs, loadpull performance, reference circuit, package information.

For more information, please contact:

4600 Silicon Drive  
 Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
 919.407.7816

## Notes

---

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.