


# GTVA107001EC


## Thermally-Enhanced High Power RF GaN on SiC HEMT 700 W, 50 V, 960 – 1215 MHz

### Description

The GTVA107001EC is a 700-watt GaN on SiC high electron mobility transistor (HEMT) for use in the 960 to 1215 MHz frequency band. It features input matching, high efficiency, and thermally-enhanced packages, with bolt-down flange.



GTVA107001EC  
Package H-36248-2

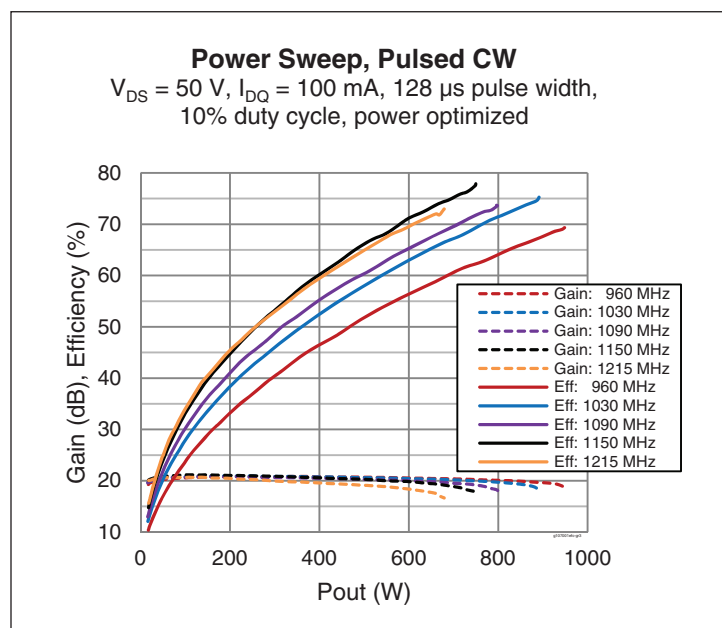

### Features

- GaN on SiC HEMT technology
- Input matched
- Typical pulsed CW performance (class AB), 1030 MHz, 50 V, 128  $\mu\text{s}$  pulse width, 10% duty cycle
  - Output power  $P_{3dB} = 890\text{ W}$
  - Drain efficiency = 75%
  - Gain = 18 dB
- Capable of withstanding a 10:1 load mismatch (all phase angles at 700 W peak power under pulse conditions: 50 V, 100 mA  $I_{DQ}$ , 128  $\mu\text{s}$  pulse width, 10% duty cycle)
- Human Body Model Class IC (per ANSI/ESDA/ JEDEC JS-001)
- Pb-free and RoHS-compliant

### RF Characteristics

**Pulsed RF Performance** (tested in Wolfspeed production test fixture)

$V_{DD} = 50\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ ,  $P_{OUT} = 700\text{ W}$ ,  $f = 1030\text{ MHz}$ , 128  $\mu\text{s}$  pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	17.5	20	22	dB
Drain Efficiency	$\eta_D$	67	70	—	%

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-source Breakdown Voltage	$V_{GS} = -8\text{ V}$ , $I_D = 10\text{ mA}$	$V_{(BR)DSS}$	150	—	—	V
Drain-source Leakage Current	$V_{GS} = -8\text{ V}$ , $V_{DS} = 10\text{ V}$	$I_{DSS}$	—	—	12	mA
Gate Threshold Voltage	$V_{DS} = 10\text{ V}$ , $I_D = 84\text{ mA}$	$V_{GS(th)}$	-6.2	-3.0	-2.2	V

## Recommended Operating Conditions

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Drain Operating Voltage		$V_{DD}$	0	—	50	V
Gate Quiescent Voltage	$V_{DS} = 50\text{ V}$ , $I_D = 0.10\text{ A}$	$V_{GS(Q)}$	—	-3.2	—	V

## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-source Voltage	$V_{DSS}$	125	V
Gate-source Voltage	$V_{GS}$	-10 to +2	V
Gate Current	$I_G$	100	mA
Drain Current	$I_D$	10	A
Junction Temperature	$T_J$	225	°C
Storage Temperature Range	$T_{STG}$	-65 to +150	°C

Operation above the maximum values listed here may cause permanent damage. Maximum ratings are absolute ratings; exceeding only one of these values may cause irreversible damage to the component. Exposure to absolute maximum rating conditions for extended periods may affect device reliability. For reliable continuous operation, the device should be operated within the operating voltage range ( $V_{DD}$ ) specified above.

## Thermal Characteristics

<sup>1</sup>  $T_{CASE} = 85\text{ °C}$ ,  $P_{diss} = 334\text{ W}$ ,  $50\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ ,  $128\text{ }\mu\text{s}$  pulse width, 10% duty cycle





<sup>2</sup>  $T_{CASE} = 85\text{ °C}$ ,  $P_{diss} = 254\text{ W}$ ,  $50\text{ V}$ ,  $I_{DQ} = 100\text{ mA}$ , Mode-S signal

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction to Case <sup>1</sup>	$R_{\theta JC}$	0.21	°C/W
Thermal Resistance, Junction to Case <sup>2</sup>	$R_{\theta JC}$	0.25	°C/W

## Ordering Information

Type and Version	Order Code	Package and Description	Shipping
GTVA107001EC V1 R0	GTVA107001EC-V1-R0	H-36248-2, bolt-down flange	Tape & Reel, 50 pcs
GTVA107001EC V1 R2	GTVA107001EC-V1-R2	H-36248-2, bolt-down flange	Tape & Reel, 250 pcs

**Typical Performance** (data taken in Wolfspeed production test fixture)

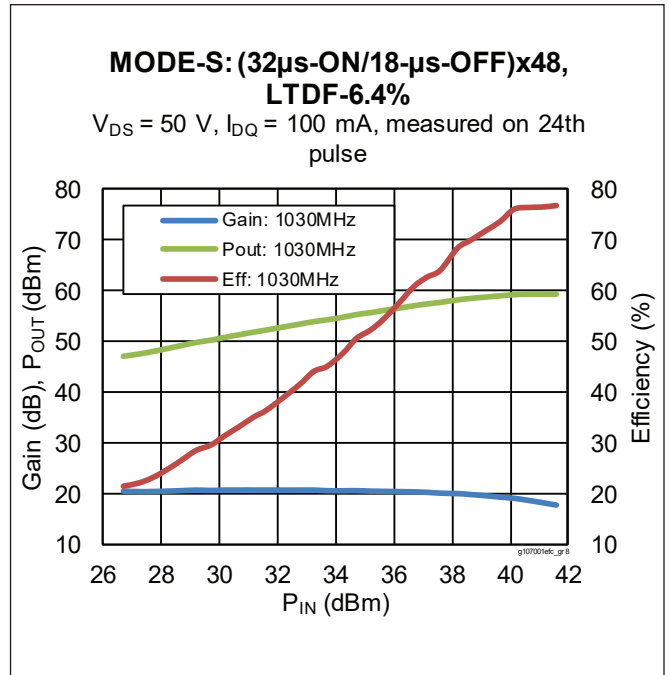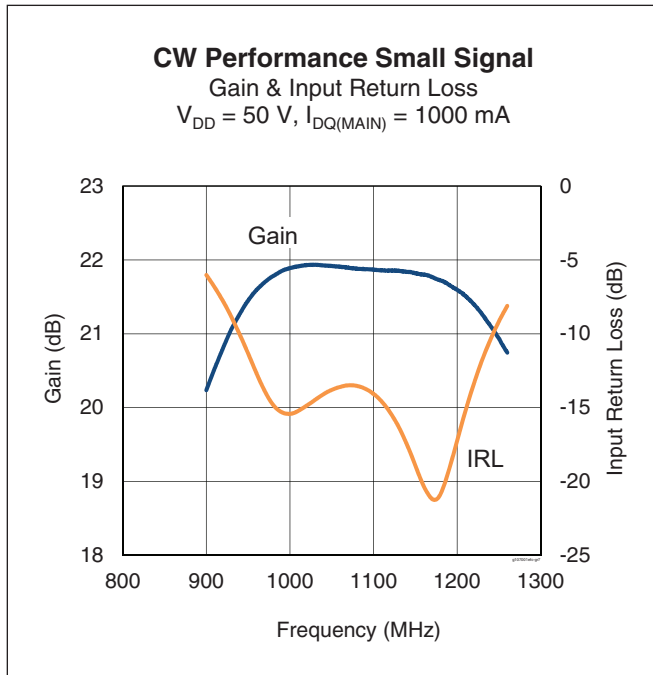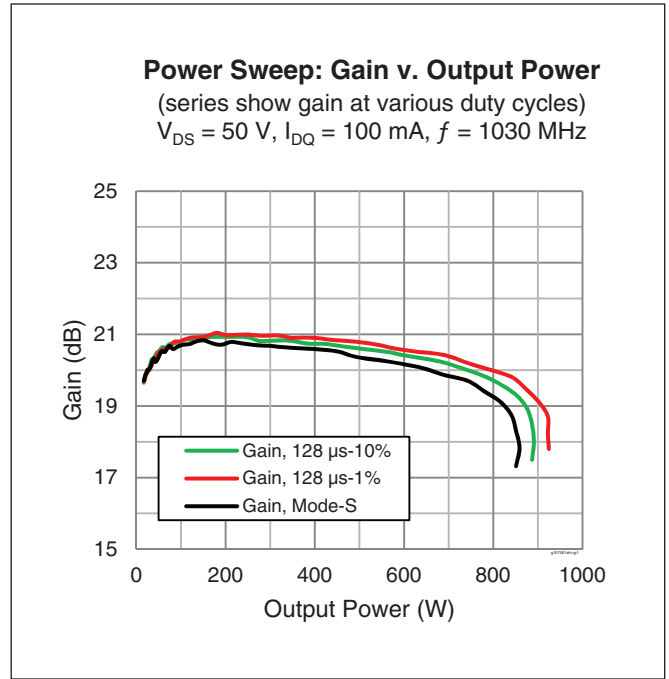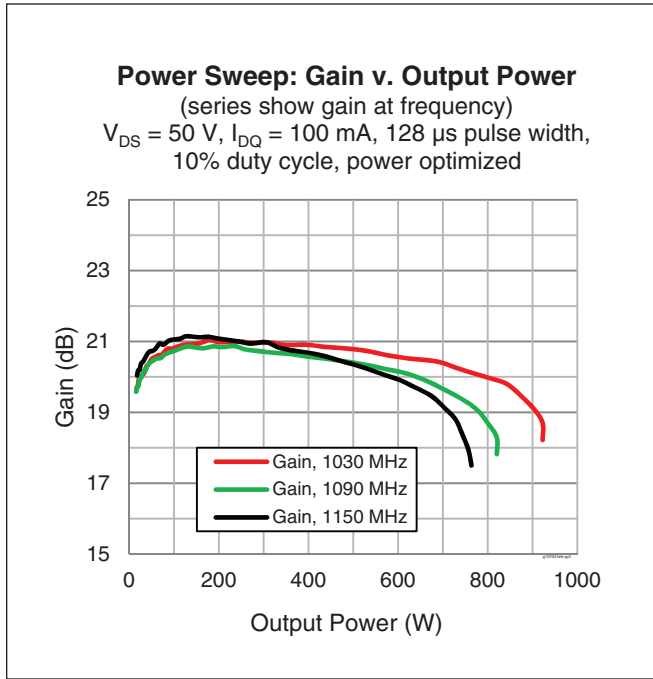


### Load Pull Performance

Each Side Load Pull Performance –16  $\mu$ s pulse width, 10% duty cycle, class AB,  $V_{DD} = 50$  V, 60 mA

Freq [MHz]	Max Output Power					Max Efficiency					Z Optimum					
	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	P <sub>OUT</sub> [dBm]	P <sub>OUT</sub> [W]	Eff [%]	Gain [dB]	Z <sub>Load</sub> [ $\Omega$ ]	Z <sub>Source</sub> [ $\Omega$ ]
960	60.37	1088.93	75.03	19.66	1.28+j0.10	59.43	877.00	83.15	20.84	1.37+j0.85	60.02	1004.62	79.99	20.45	1.28+j0.52	0.38-j1.05
1030	60.14	1032.76	74.45	19.58	1.28+j0.19	58.68	737.90	83.12	20.88	1.61+j1.01	60.01	1002.31	78.22	20.00	1.39+j0.43	0.43-j1.15
1090	59.88	972.75	73.06	19.08	1.32+j0.28	58.73	746.45	80.44	19.94	1.83+j0.97	59.70	933.25	77.40	19.53	1.48+j0.52	0.66-j1.27
1150	59.34	859.01	67.27	19.46	1.51+j0.13	58.30	676.08	77.38	20.91	1.72+j1.07	59.21	833.68	72.17	20.07	1.59+j0.46	0.81-j1.44
1200	59.20	831.76	66.29	19.34	1.54+j0.11	58.12	648.63	75.83	20.09	2.19+j0.97	59.09	810.96	70.51	19.79	1.68+j0.33	1.00-j1.73
1215	59.02	797.99	65.34	19.44	1.59+j0.01	57.74	594.29	73.93	20.63	2.02+j1.07	58.94	783.43	70.07	19.97	1.70+j0.33	1.55-j1.60

### Reference Circuit tuned for 0.960 to 1.215 GHz

DUT	GTVA107001EC V1
Reference Circuit Part No.	LTN/GTVA107001EC V1
PCB	Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$

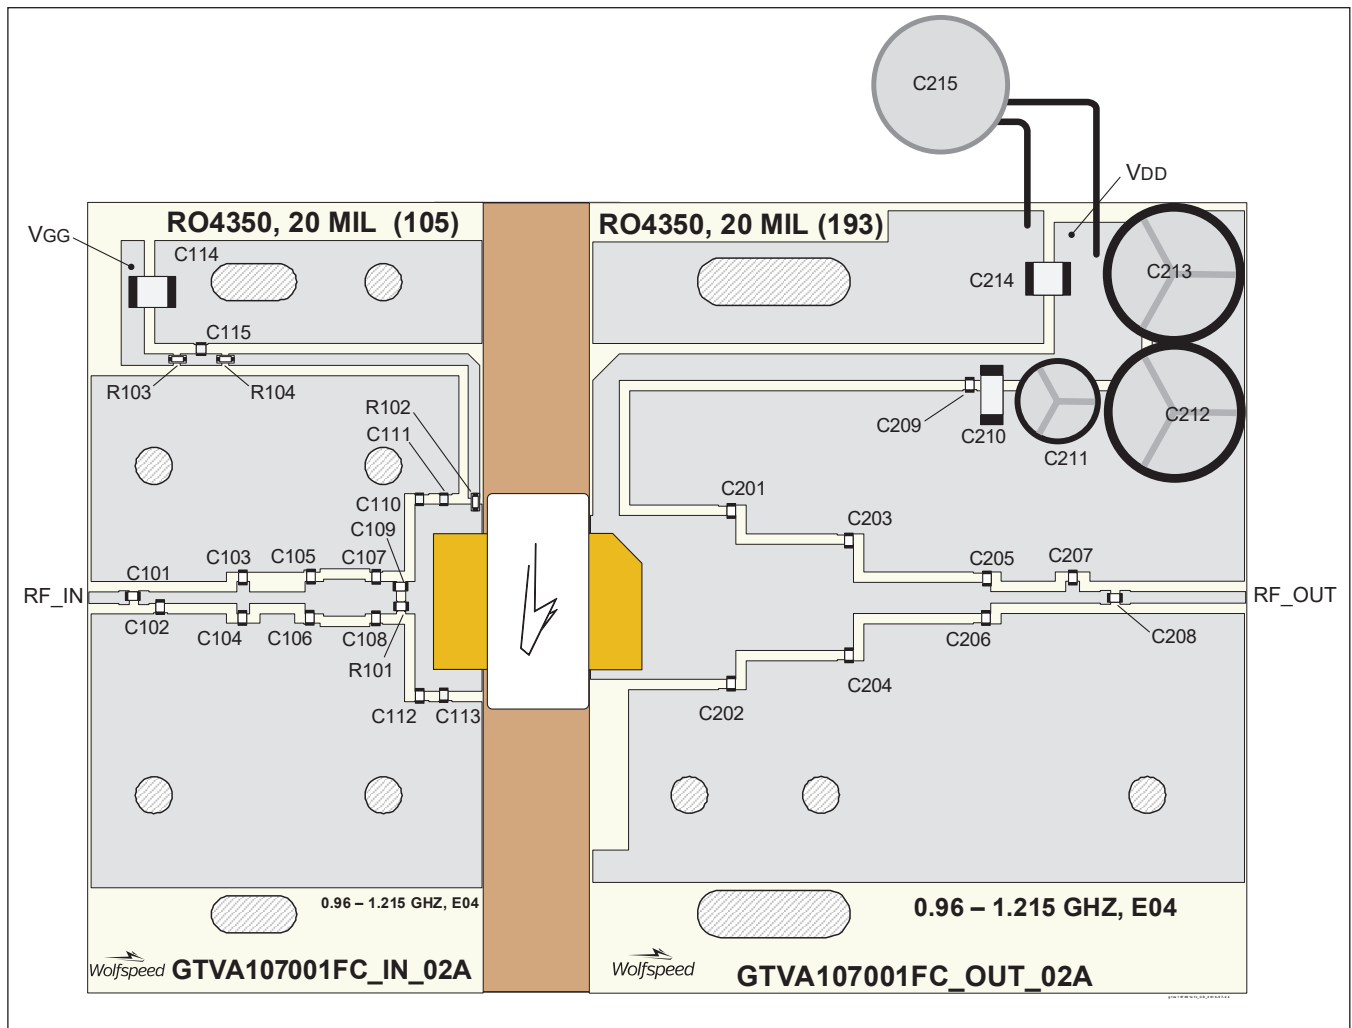


Reference circuit assembly diagram (not to scale)

**Reference Circuit** (cont.)


**Components Information**

Component	Description	Manufacturer	P/N
<b>Input</b>			
C101, C109, C115	Capacitor, 56 pF	ATC	ATC800A560JT250XT
C102	Capacitor, 0.4 pF	ATC	ATC600F0R4AT250XT
C103, C104	Capacitor, 1 pF	ATC	ATC600F1R0BT250XT
C105	Capacitor, 3.6 pF	ATC	ATC600F3R6BT250XT
C106	Capacitor, 3.3 pF	ATC	ATC600F3R3BT250XT
C107, C108	Capacitor, 0.2 pF	ATC	ATC600F0R2AT250XT
C110, C112, C113	Capacitor, 5.6 pF	ATC	ATC600F5R6BT250XT
C111	Capacitor, 6.8 pF	ATC	ATC600F6R8BT250XT
C114	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
R101, R102	Resistor, 10 W	Panasonic – ECG	ERJ-3GEYJ100V
R103	Resistor, 5.6 W	Panasonic – ECG	ERJ-8RQJ5R6V
R104	Resistor, 100 W	Panasonic – ECG	ERJ-3GEYJ101V
<b>Output</b>			
C201	Capacitor, 7.5 pF	ATC	ATC600F7R5BT250XT
C202	Capacitor, 6.8 pF	ATC	ATC600F6R8BT250XT
C203, C204	Capacitor, 2.4 pF	ATC	ATC600F2R4BT250XT
C205, C206, C207	Capacitor, 1.5 pF	ATC	ATC600F1R5BT250XT
C208	Capacitor, 39 pF	ATC	ATC600F390JT250XT
C209	Capacitor, 56 pF	ATC	ATC800A560JT250XT
C210	Capacitor, 10 μF	TDK Corporation	C5750X5R1H106K230KA
C211	Capacitor, 22 μF	Cornell Dubilier Electronics (CDE)	SEK220M100ST
C212	Capacitor, 100 μF	Cornell Dubilier Electronics (CDE)	SK101M100ST
C213	Capacitor, 220 μF	Panasonic – ECG	ECA-2AHG221
C214	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
C215	Capacitor, 100 V, 6800 μF	Panasonic – ECG	ECO-S2AP682EA

**Pinout Diagram** (top view)

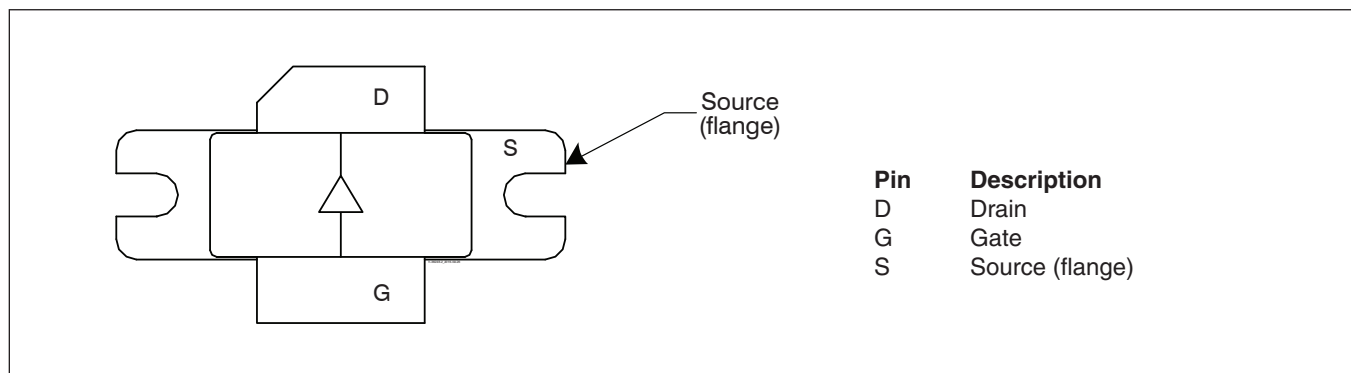

Package Outline Specifications

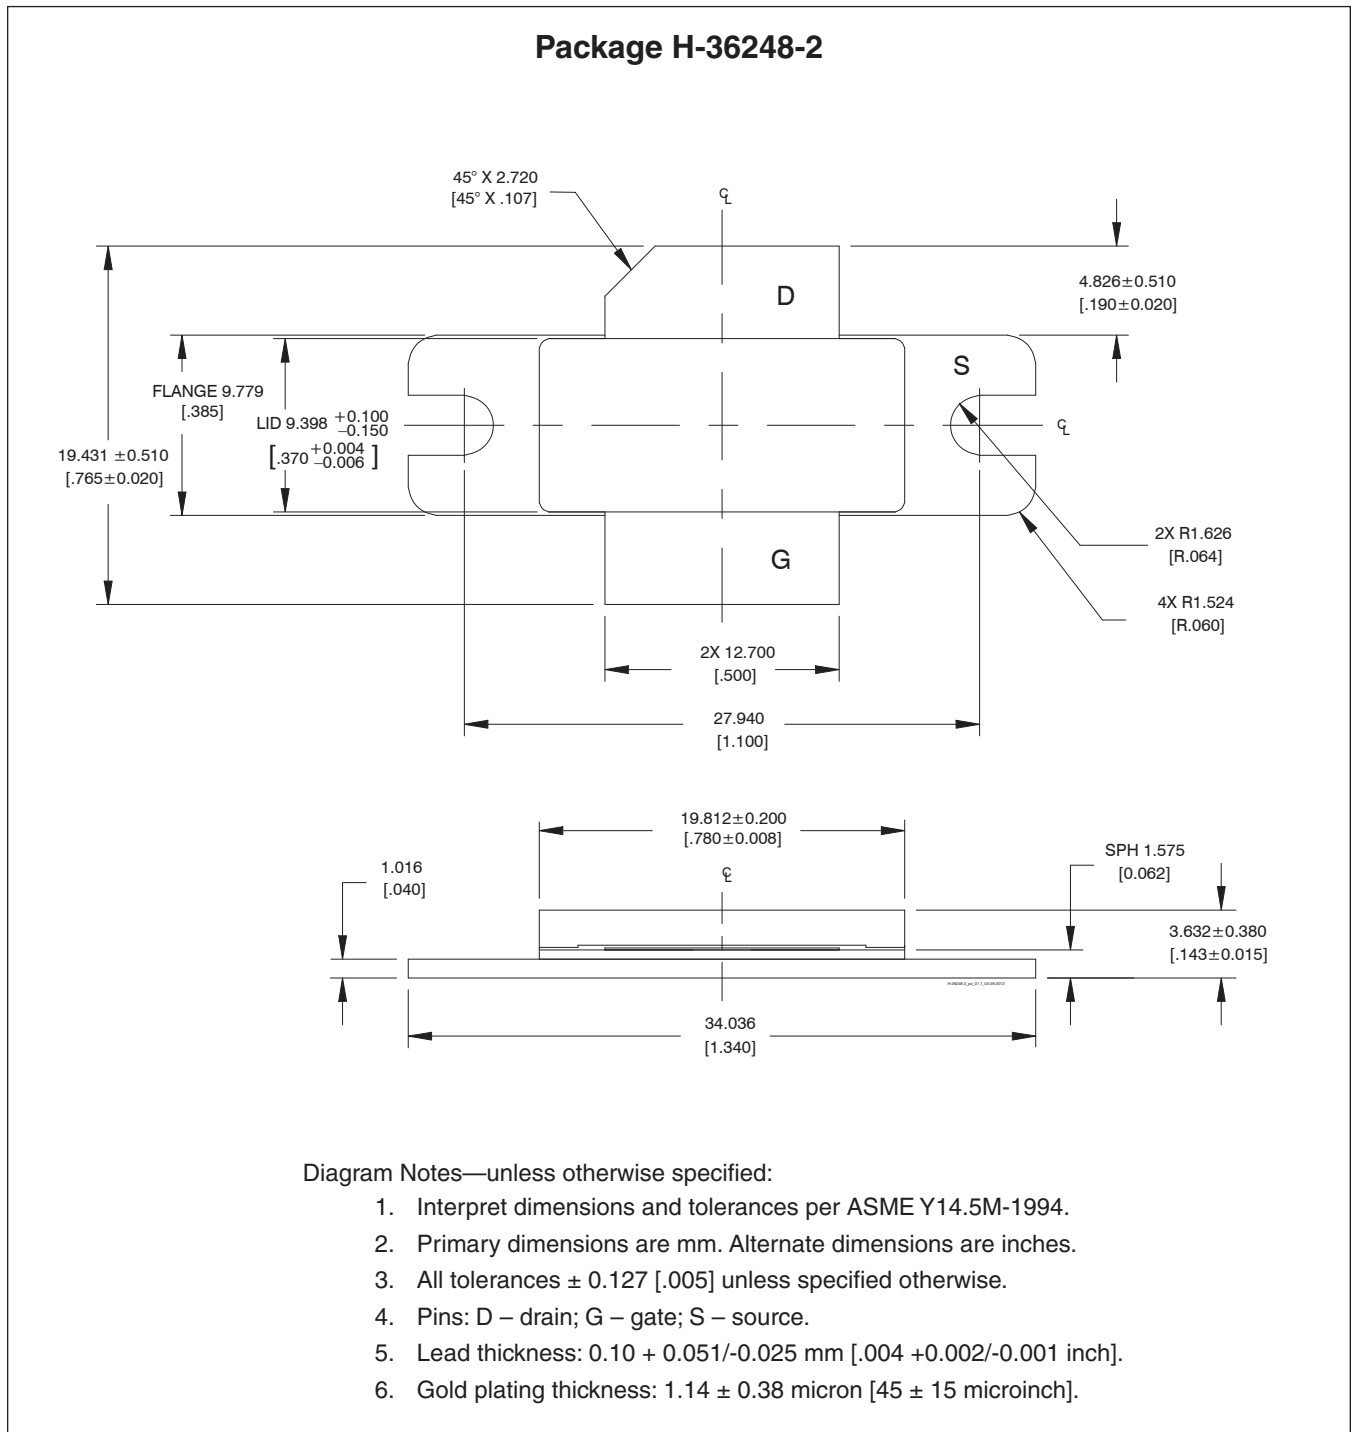

## Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes at each revision)
01	2016-09-27	Advance	All	Data Sheet reflects advance specification for product development
02	2018-05-21	Preliminary	All	Data Sheet shows typical performance information and reference circuit
02.1	2018-07-19	Production	All 1, 3 4	Data Sheet reflects released product specification Updated Typ pulsed CW performance, added Mode S graph Added loadpull information, added C215 to reference circuit and component list
02.2	2018-10-02	Production	2	Updated thermal characteristics

For more information, please contact:

4600 Silicon Drive  
Durham, North Carolina, USA 27703  
[www.wolfspeed.com/RF](http://www.wolfspeed.com/RF)

Sales Contact  
[RFSales@wolfspeed.com](mailto:RFSales@wolfspeed.com)

RF Product Marketing Contact  
[RFMarketing@wolfspeed.com](mailto:RFMarketing@wolfspeed.com)  
919.407.7816

## Notes

### Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.