


E3D30065D

650 V, 30 A Silicon Carbide Schottky Diode

Features

- 650-Volt Schottky rectifier
- Zero reverse recovery current
- Zero forward recovery voltage
- High-frequency operation
- Temperature-independent switching behavior
- Extremely fast switching
- Positive temperature coefficient on V_F



Wolfspeed, Inc. is in the process of rebranding its products and related materials pursuant to the entity name change from Cree, Inc. to Wolfspeed, Inc. During this transition period, products received may be marked with either the Cree name and/or logo or the Wolfspeed name and/or logo.

Applications

- Automotive and traction power conversion
- Battery charging systems
- Boost diodes in PFC or DC/DC stages
- Free wheeling diodes in inverter stages
- AC/DC converters
- PV inverters

Benefits

- Higher system level efficiency
- Increase system power density
- Reduction of heat sink requirements
- Parallel devices without thermal runaway

Maximum Ratings (T_c = 25 °C Unless Otherwise Specified)

Parameter	Symbol	Value	Unit	Test Conditions	Note	
Repetitive Peak Reverse Voltage	V _{RRM}	650	V			
DC Peak Reverse Voltage	V _R	650	v			
	I _F	42*/84**	A	T _c =25 °C		
Continuous Forward Current		20*/40**		T _c =135 °C	Fig. 3	
		15*/30**		T _c = 150 °C	1	
Power Dissipation	P _{tot}	179*	w	T _c =25 °C	- Fig. 4	
		77*		T _c =110 °C		
		57*		T _c = 25 °C, t _P = 10 ms, Half Sine Pulse		
Repetitive Peak Forward Surge Current	FRM	33*	A	T _c = 110 °C, t _P = 10 ms, Half Sine Pulse		
Diode dV/dt Ruggedness	dV/dt	200	V/ns	V _R =0-650 V		
Operating Junction and Storage Temperature	T _J , T _{stg}	-55 to +175	°C			
		1	Nm	M3 Screw		
O-247 Mounting Torque		8.8	Ibf-in	6-32 Screw]	

* Per Leg, ** Per Device



Electrical Characteristics

Parameter	Symbol	Тур.	Max.	Unit	Test Conditions	Note	
Family alterat		1.5*	1.8*	- V	I _F = 16 A, T _J = 25 °C	Fig. 1	
Forward Voltage	V _F	2.0*	2.4*		I _F = 16 A, T _J = 175 °C		
		18*	95*	μΑ	V _R = 650 V, T _J = 25 °C	Fig. 2	
Reverse Current	I _R	38*	378*		V _R = 650 V, T _J = 175 °C		
Total Capacitive Charge	Q _c	43*		nC	$V_{R} = 400 \text{ V}, I_{F} = 16 \text{ A}, T_{J} = 25 \text{ °C}$	Fig. 5	
Total Capacitance	c	744*		pF	V _R = 0 V, T _J = 25 °C, f = 1 MHz		
		76*			$V_{R} = 200 \text{ V}, \text{ T}_{J} = 25 \text{ °C}, \text{ f} = 1 \text{ MHz}$	Fig. 6	
		70*			$V_{R} = 400 \text{ V}, \text{ T}_{J} = 25 \text{ °C}, \text{ f} = 1 \text{ MHz}$		
Capacitance Stored Energy	E _c	7.3*		μJ	V _R = 400 V	Fig. 7	

Note: This is a majority carrier diode, so there is no reverse recovery charge.

Thermal Characteristics

Parameter	Symbol	Тур.	Unit	Note
Thermal Resistance from Junction to Case	R _{θJC}	0.84*	°C /M	Fig. 8
		0.42**	- °C/W	

* Per Leg, ** Per Device

Typical Performance (Per Leg)






Figure 1. Forward Characteristics





Rev. 1, SEPTEMBER 2023

4600 Silicon Drive | Durham, NC 27703 | Tel: +1.919.313.5300 | wolfspeed.com/power

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Typical Performance (Per Leg)


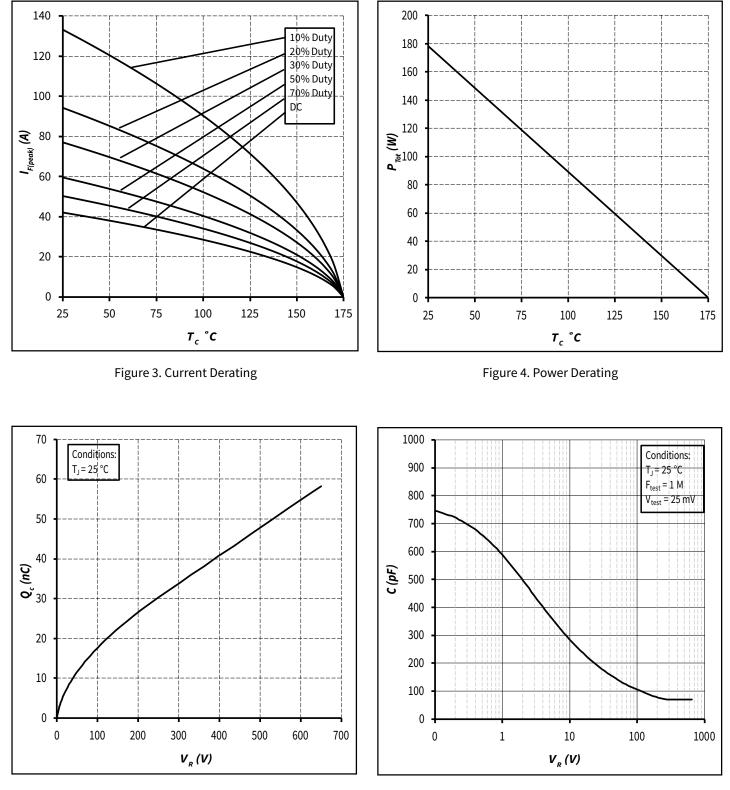


Figure 5. Recovery Charge vs. Reverse Voltage



Rev. 1, SEPTEMBER 2023

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Typical Performance (Per Leg)

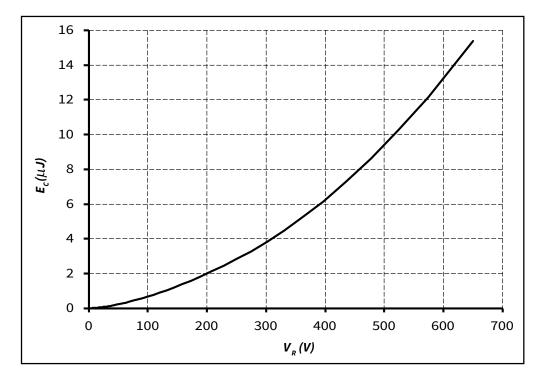


Figure 7. Typical Capacitance Stored Energy

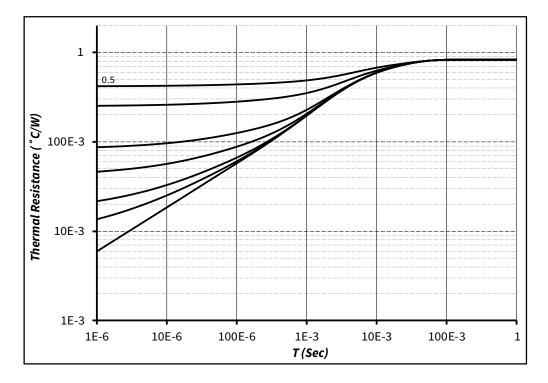


Figure 8. Transient Thermal Impedance


Rev. 1, SEPTEMBER 2023

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Package Dimensions

Package: TO-247-3

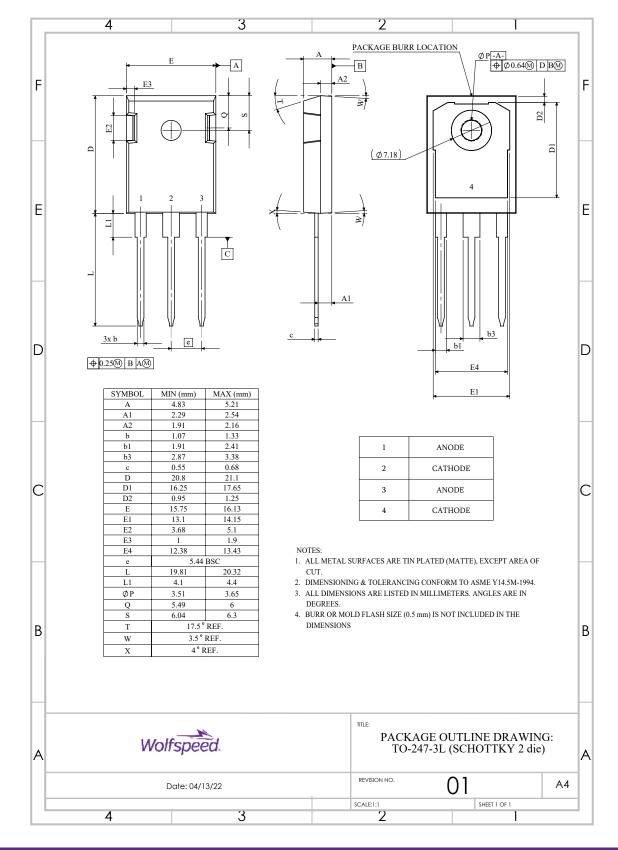


Rev. 1, SEPTEMBER 2023

4600 Silicon Drive | Durham, NC 27703 | Tel: +1.919.313.5300 | wolfspeed.com/power

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Recommended Solder Pad Layout

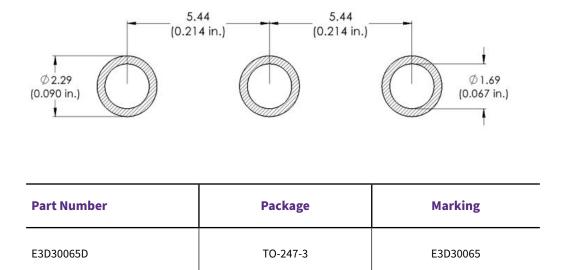

Rev. 1, SEPTEMBER 2023

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed[®] and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Revision History

Current Revision	Date of Release	Description of Changes
1	September-2023	Updated Wolfspeed branding, package drawing, and solder pad layout

Rev. 1, SEPTEMBER 2023

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed[®] and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. The information in this document is subject to change without notice.



Notes & Disclaimer

This document and the information contained herein are subject to change without notice. Any such change shall be evidenced by the publication of an updated version of this document by Wolfspeed. No communication from any employee or agent of Wolfspeed or any third party shall effect an amendment or modification of this document. No responsibility is assumed by Wolfspeed for any infringement of patents or other rights of third parties which may result from use of the information contained herein. No license is granted by implication or otherwise under any patent or patent rights of Wolfspeed.

Notwithstanding any application-specific information, guidance, assistance, or support that Wolfspeed may provide, the buyer of this product is solely responsible for determining the suitability of this product for the buyer's purposes, including without limitation for use in the applications identified in the next bullet point, and for the compliance of the buyers' products, including those that incorporate this product, with all applicable legal, regulatory, and safety-related requirements.

This product has not been designed or tested for use in, and is not intended for use in, applications in which failure of the product would reasonably be expected to cause death, personal injury, or property damage, including but not limited to equipment implanted into the human body, life-support machines, cardiac defibrillators, and similar emergency medical equipment, aircraft navigation, communication, and control systems, aircraft power and propulsion systems, air traffic control systems, and equipment used in the planning, construction, maintenance, or operation of nuclear facilities.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Wolfspeed representative or from the Product Documentation sections of www.wolfspeed.com.

REACh Compliance

REACh substances of high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact your Wolfspeed representative to ensure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

Contact info:

4600 Silicon Drive Durham, NC 27703 USA Tel: +1.919.313.5300 www.wolfspeed.com/power

© 2023 Wolfspeed, Inc. All rights reserved. Wolfspeed® and the Wolfstreak logo are registered trademarks and the Wolfspeed logo is a trademark of Wolfspeed, Inc. PATENT: https://www.wolfspeed.com/legal/patents

The information in this document is subject to change without notice.

Rev. 1, SEPTEMBER 2023